mahindra IMPLEMENTS * * * * * *





TABLE OF CONTENTS

intro	2
Pallet Forks	4-5
Bale Spears	6-7
Rake Grapples	8-9
4-in-1 Buckets	10 - 11
Rock Buckets	12 - 13
Standard-duty Rotary Cutters	14 - 15
Medium-duty Rotary Cutters	16 - 17
Heavy-duty Rotary Cutters	
Flex Wing Rotary Cutters	20 - 21
Finish Mowers	24 - 25
Box Scrapers	26 - 27
Tillers	28 - 29
Medium-duty Disc Harrows	30 - 31
Rear Blades	32 - 33
Landscape Rakes	34 - 35
Land Levelers	36 - 37
Augers	38 - 39
Spreaders	40 - 41
Hitches	42 - 43





PALLET FORKS

LET US DO THE LIFTING

Mahindra pallet forks are heavy duty so you can bulk up. Pile on the lumber, feed or seed and we'll lift it with enthusiasm. Our pallet forks are built to save trips and shoulder whatever (up to 4,000 lb.) bulky, cumbersome weight you need moved from A to B all the way to Z. Our customers have used Mahindra pallet forks for unique applications as well. Some use them to place their 4-wheelers and riding mowers into their pickup trucks. Bottom line: we have your back by being a back saver.

- Reduce downtime using its quick skid steer tool carrier
- Safely and easily adjust fork spacing to match load width
- Protect the tractor and operator from materials via vertical guards
- Replace damaged forks economically and quickly
- Available in two sizes to accommodate any size Mahindra tractor
- One-year warranty for peace of mind



FORK FEATURES	PALLET FORKS 2000	PALLET FORKS 4000	
Attachment Type	Skid steer tool carrier		
Maximum Lift Capacity (lb)	2000	4000	
Overall Height (in)	30	34	
Overall Length (in)	46	5.5	
Vertical Guard Bars	8	5	
Fork Replacement	Y	es	
Fork size (in)	3 wide x 1 thick	4 wide × 1.25 thick	
Fork Length (in)	42	48	
Rails	Lockin	g Slide	
Min/Max Adjustable Widths (in)	1.5 to 44.5	4 to 45.0	
Weight (lb)	236	400	
Warranty	1-Year	Limited	
SKU No.	PFA2000	PFA4000	
TRACTOR COMPATIBILITY	PALLET FORKS 2000	PALLET FORKS 4000	
2100			
2100	X		
Max 26XLT	×		
Max 26XLT	X		
Max 26XLT 1626	X X		
Max 26XLT 1626 1635	X X X		
Max 26XLT 1626 1635 1640	X X X		
Max 26XLT 1626 1635 1640 2638	X X X X	X	
Max 26XLT 1626 1635 1640 2638 2645	X X X X	X X	
Max 26XLT 1626 1635 1640 2638 2645 2660	X X X X		
Max 26XLT 1626 1635 1640 2638 2645 2660 2670	X X X X	X	
Max 26XLT 1626 1635 1640 2638 2645 2660 2670	X X X X	X X	

 $For older \ Mahindra \ tractor \ models \ that \ are \ not \ listed \ on \ the \ compatibility \ sheet, \ please \ consult \ with \ your \ Mahindra \ dealer \ for \ your \ implement \ selection.$

BALE SPEARS

STICK TO IT

Mahindra bale spears aren't afraid to poke a bear of a bale of hay. They live for it. Ideal for medium to large livestock and mixed farms, our heavy-duty bale spears are engineered for handling 500- to 2000-lb round hay and silage bales. They come in two configurations. A single spear is excellent for small round bales while the double spear tackles large round or square bales. You might say Mahindra bale spears have stick-to-itiveness.

- Reduce downtime using its quick skid steer tool carrier
- Comes in single and double spear configurations to maximize load lifting
- Designed to replace damaged main spears economically and quickly
- · One-year warranty for peace of mind



SPEAR FEATURES	SINGLE SPEAR	DOUBLE SPEAR		
Attachment Type	Skid steer tool carrier			
Spear Number	1	2		
Rated Capacity (lb) @ 23.5 (in) Elevation	3500	4000		
Spear Length (in)	49.	25		
Usable Spear Length (in)	42	5		
Spear Diameter (in)	1.7	78		
Replaceable Spear(s)	Ye	25		
Weight	152	184		
Warranty	1-Year	Limited		
SKU No.	BSASSS	BSADSS		
TRACTOR COMPATIBILITY	SINGLE SPEAR	DOUBLE SPEAR		
4540	X			
4550	×			
5145 / 5155	X			
6065 / 6075	X	Х		

^[2] Bale weight not to exceed loader lift capacity

RAKE GRAPPLES

SINK OUR TEETH INTO THE JOB

Mahindra rake grapples are great for gathering roots, stumps, and other debris like stone or concrete while leaving the dirt where it belongs. They also excel at demolition and carry out quick work when transporting timbered logs, precast pipe, and other bulky material. Go ahead and bite off more than a mouthful with this tool.

- Reduce downtime using its quick skid steer tool carrier
- Comes in 64- or 72-inch width configurations and long forks to maximize load capacity
- •. Hydraulic power with easy-to-grease pivot pins for years of dependability
- •. One-year warranty for peace of mind



GRAPPLE FEATURES	54-INCH	64-INCH	72-INCH	
Attachment Type	Skid steer tool carrier & Third Function			
Overall Height (in)	29.7	44.8		
Overall Length (in)	15.8	22	2.8	
Grapple Width (in)	49.4	59.1	68.2	
Rake Width (in)	54	64.5	73.7	
Grapple Opening (in)	30.4	54	4.6	
Tooth Position (in)	_	22	2.4	
Top / Bottom Tine Spacing (in)	10.2 / 8.3	15.75	14.5	
Weight (lb)	225	446	495	
Warranty		1-Year Limited		
SKU No.	RGA54	RGA64	RGA72	
TRACTOR COMPATIBILITY	54-INCH	64-INCH	72-INCH	
eMax 20S	X			
1100	X			
eMax 25L	X			
Max 25XL	X			
Max 26XLT	X			
2100	X			
1626	X	X		
1635		X		
1640		X		
2638		X		
2645		X		
2660			X	
2670			X	
4540			X	
4550			X	
5145 / 5155			X	

4-IN-1 BUCKETS

ONE TOOL TO HANDLE IT ALL

Why buy multiple implements for cleanup, grading, scraping, grappling, dozing, and brush removal when you can buy just one that does it all? Introducing the Mahindra 4-in-1 Bucket, a multi-tool comprising a bucket, a grapple, a dozer, and a scraper. Use the loader bucket to load, move and broadcast materials like pea gravel, mulch or dirt using the bottom dump feature. Use the grapple to clamp large bulky items like boulders, concrete footings, or logs. Push away unwanted brush and other debris using the dozer configuration. And level and contour your property with the scraper blade. The 4-in-1 Bucket is a whole heaping of extra.

- •. Single-bevel, scraper blade bolts on for easy replacement
- Front and back grapple edges are double-beveled and bolt on for easy rotation

- •. Hydraulic hoses and couplers included
- •. One-year warranty for peace of mind



BUCKET FEATURES	5 FT	6 FT		
Width (in)	60.96	72.96		
Height (in)	27.32	27.32		
Length (in)	34.47	34.47		
Clam Length (in)	23.06	23.06		
Back Blade Length (in)	12.36	12.36		
Clam Opening (in)	34.64	34.64		
Operating Pressure (psi)	2250	2250		
Clamping Force (lb)	2354	2354		
Weight (lb)	585	655		
Heaped Capacity (cu-ft)	12.23	17.23		
Cylinder Dimensions (in)	Bore 2.00 / Stroke 7.50 / Rod Diameter 1.12			
Warranty	1-Year	Limited		
SKU No.	BUA4IN15	BUA4IN16		
TRACTOR COMPATIBILITY	5 FT	6 FT		
2638	X			
2645	X			
2660	X			
2670	X			
4540	X	X		
4550	X	X		
5145 / 5155	X	X		
6065 / 6075		X		

ROCK BUCKETS

SIFT AND SAVE

Need to clear the dirt of debris without soiling the soil? This implement is built for it. Easily rake, pile and haul away unwanted materials using the Mahindra rock bucket. It's a heavy-duty tool for quickly sifting soil while collecting rocks, roots, tree limbs, building scraps, landscaping waste, and other debris on your property or construction site. Want not and waste not.

- Great for rock yards, lumber yards, construction sites, box stores, and warehouses
- Heavy-duty, set-up and welded tube framing

- •. 3-inch tine spacing to easily sifts dirt while capturing rocks and other debris
- •. One-year warranty for peace of mind



BUCKET FEATURES	55 I N	66 IN	75 I N	
Attachment Type	Skid steer tool carrier			
Overall Width (in)	62	68	75	
Overall Depth (in)		45.5		
Overall Height (in)		21.5		
Tine Spacing (in)		3		
Tine Width (in)		3/8		
Number of Tines	18	22	25	
Weight (lb)	530	570	610	
Warranty		1-Year Limited		
SKU No.	RBTD55	RBTD66	RBTD75	
TRACTOR COMPATIBILITY	55 IN	66 IN	75 IN	
Max 26XLT	X			
2100	X			
1626	X	X		
1635	×	×		
1640	X	X		
2638		×		
2645		×		
2660		×	X	
2670		×	X	
4540		×	X	
4550		X	X	
5145 / 5155		X	X	
6065 / 6075			X	

STANDARD-DUTY ROTARY CUTTERS

KEEP YOUR LITTLE PLOT OF HAPPINESS WELL SPRUCED

The Mahindra standard-duty rotary cutter is perfect for small acreage. Easily mow down tall grass, thickets, and new growth saplings in paddocks, fields, woods, and footpaths. It comes with lots of options, including a slip clutch and front and rear chains, for more abusive and intrusive environments. And as a testament to its durability, it's backed by a strong warranty.

- •. Fully-welded, 12-gauge steel deck with replaceable skid shoes for long product life
- •. 40 hp gearbox with a 5-year limited warranty

- •. Cuts up to 1.5-inch diameter trees
- •. Front and rear chain guards available on request



CUTTER FEATURE	4	FT	5 F	-т	6	FT
Connection Type			Top Link	Flexible		
Hitch Category			CAT	Г1		
Quick-hitch Compatible			Ν	0		
Cutting Height (in) [4]			2 -	6		
Cutting Capacity Diameter (in)			1.	5		
Deck Thickness (ga)			1:	2		
Side Bands			HD 7-inch	n Channel		
PTO Drive Shaft			Serie	es 4		
Stump Jumper			Pa	an		
Gear Box (hp)			40	HP		
Wheels			(1) Solid L	.aminated		
Hub			Lubric	ating		
Skid Shoes			Ν	О		
Weight (lb)	40)5	47	7 0	5.	50
Warranty	5-year	limited warran	ty for Gearbox;	1-year limited f	or other compo	onents
SKU No.	RCASD4SP	RCASD4SC	RCASD5SP	RCASD5SC	RCASD6SP	RCASD6SC
TRACTOR COMPATIBILITY	41	FT	5 (=т	6	FT
eMax 20S	X	X				
1100	X	X				
eMax 25L	X	×				
Max 25XL	X	X				
Max 26XLT	X	×				
2100			X	X		
1626			×	X		
1635			X	X		
1640			×	X		
2638			X	X	X	X
2645			X	X	X	X
2660					X	X
2670					X	X
4540					×	X
4550					×	×

[4] Uses 3-inch offset blades

MEDIUM-DUTY ROTARY CUTTERS

KEEP YOUR MEDIUM-SIZE PROPERTY CLEAR OF BRUSH AND GRASS

Medium-size property owners, including farmers and hunt clubs, rejoice. You can rely on the Mahindra medium-duty rotary cutter to cut down overgrown brush, dense vegetation, and 2-inch diameter trees in pastures and woodlands, shooting lanes, and trails. While classified as medium-duty, it boasts heavy-duty components like a high-horsepower gearbox, an overbuilt stump jumper, a standard slip clutch, and a stellar warranty.

- •. Fully-welded, 11-gauge steel deck with replaceable skid shoes for long product life
- •. 90 hp gearbox with a 5-year limited warranty

- •. Choose shear bolt or slip clutch
- •. Cuts up to 2-inch diameter trees
- •. Front and rear chain guards on some models



CUTTER FEATURES	5 (FT	6 FT	7 FT
	ONE TAIL WHEEL		TWO TAIL WHEEL	
Connection Type		Top Link	Flexible	
Hitch Category		1/2 Cle	vis Type	
Quick-hitch Compatible		Y	es	
Cutting Height (in) [4]		6 -	Feb	
Cutting Capacity Diameter (in)		;	2	
Deck Thickness (ga)		1	0	
Side Bands		10 ga 7-in	ch Channel	
PTO Drive Shaft		Seri	es 5	
Stump Jumper		Pan	Туре	
Gear Box (hp)		8	5	
Wheels	(1) Solid Laminated		(2) Solid Laminated	
Hub		Lubri	cating	
Skid Shoes		Repla	ceable	
Weight (lb)	700	735	885	1035
Warranty	5-year limited	warranty for Gearbox;	1-year limited for other	r components
SKU No.	RCAMD5SC	RCAMD5SC2TW	RCAMD6SC2TW	RCAMD7SC2TW
TRACTOR COMPATIBILITY	51	FT	6 FT	7 FT
2660	X	X	X	X
2670	X	X	X	X
4540			X	X
4550			X	X
5145			X	X
5155			X	X
6065				X
6075				X

[4] Uses 3-inch offset blades

HEAVY-DUTY ROTARY CUTTERS

BIGGER FIELDS NEED A BIG LEAGUER

Large property owners including livestock and mixed farms, nurseries, orchards, and hunt clubs will appreciate a Mahindra heavy-duty rotary cutter. It takes the abuse of rocks and stumps while clearing overgrown brush, dense vegetation, and saplings up to 3 inches — thanks to its indestructible housing, overbuilt gearbox and slip clutch. It comes with a rock-solid warranty too, so you can confidently mow your fields into pristine condition year after year.

- •. Available in 3-pt lift and trailed configurations
- •. Lift models CAT 1 or 2 quick-hitch compatible
- Fully-welded, 7-gauge steel deck with replaceable skid shoes for long product life
- •. Cuts up to 3-inch diameter trees
- •. Front and rear chain guards on some models
- Gearboxes with 5-year limited warranty



CUTTER FEATURES	8 FT	10 FT	10 FT	
	LIFT		TRAILED	
Connection Type	3 - p1	: Lift	Drawbar	
Transport Width	98	122	126	
Hitch Category	CA	Т 2	-	
Quick-hitch Compatible	Y	es	-	
Cutting Height (in) [4]		2 - 8		
Cutting Capacity Diameter (in)		3		
Deck Thickness (ga)	10	-	7	
Side Bands (ga)	10 ga 11" Channel	10 ga 8"	Channel	
Minimum Engine Power (hp)	50	6	5	
PTO Drive Shaft (Slip Clutch)		Series 5		
Center Drive Shaft		Shock Coupler-Protected		
Stump Jumper	3/16" Pan	1/2"	Plate	
Center Gear Box (hp)		120		
Outboard Gear Boxes (hp)		(2) 85		
Wheels		(2) Solid Laminated		
Spindle Hubs		Ball Bearing		
Weight (lb)	1500	2000	2150	
Warranty	5-year limited warran	ty for Gearbox; 1-year limited f	for other components	
SKU No.	RCAHD8SCCG	G RCAHD10SCLCG KRCHD120SCLC		
TRACTOR COMPATIBILITY	8 FT	10 FT	10 FT	
5145				
5155	X		X	
6065 / 6075	X	X	X	

[4] Uses 3-inch offset blades

For older Mahindra tractor models that are not listed on the compatibility sheet, please consult with your Mahindra dealer for your implement selection.

19

FLEX WING ROTARY CUTTERS

WHEN YOU NEED A CUT ABOVE

This is the pro-choice for contour-cutting of brush and grass that you can depend on. The Mahindra F-Series flex-wing rotary cutters are ideal for airports, campuses, estates, farms, parks, orchards, and roadsides. But that's not all. The Flex-Wing deck design lets you cut on rolling terrain without having to make multiple passes and are available in three widths, including 10, 12, and 15 feet.

- Safety features include deflectors and/ or chain guards to protect people, passing cars, and buildings from rocks and debris
- Replaceable, anti-scalping skid shoes for excellent ground contouring and long-lasting deck life
- Smooth, thick wall decks for easy cleanup, preventing rust, and long life
- •. Easy-lift composite hood for quick maintenance
- •. 5- or 6-year limited gearbox warranty for peace-of-mind



F-10

We designed the F-10 Flex Wing rotary cutter to operate with compact and utility tractors producing 25 or greater horsepower at the PTO. With its flexible 120-inch cutting width, you'll uniformly cut thick grass, dense brush, and saplings in no time.

FEATURES & BENEFITS

- •. Works with PTOs transmitting 25 60 hp
- •. Transport width fits through an 8-ft gate
- . Average mowing rate of 4 MPH

- •. EZ-Loc collar for fast hookup
- •. 1- to 15-inch cutting height
- •. 2-inch diameter cutting capacity

F-12

With a more compact design than our F-10 model, The F-12 Flex Wing rotary cutter makes narrow turns and close cuts around trees, thanks to its pivoting hitch and form-fitting tires. And it's unique wing-bar blade keeps it lightweight while protecting the gearbox output shaft.

FEATURES & BENEFITS

- •. Works with PTOs transmitting 35 60 hp
- . Transport width fits through a 9-ft gate
- •. 12-ft wide cutting deck

- Bi-directional pivoting hitch for impressive short turning radius in tight spaces
- •. 2- to 12-inch cutting height
- •. 1.5-inch diameter cutting capacity

F-15

For the Mahindra F-15 Flex Wing rotary cutter, we offer the off-road Farmer and the on-road Pro models. The Pro comes with deck rings to protect the cutter and gearbox shaft from asphalt and other unexpected obstacles. Suited for utility tractors, the F-15 offers a smooth top and bottom deck with dual-cut chambers, heavy-duty gearboxes, and a coil-spring suspension for fast and productive cutting.

- •. Works with PTOs transmitting 50 130 hp
- •. Transport width fits through a 10-ft gate
- •. 15-ft wide cutting deck
- •. Heavy-duty blade carrier and CAT5 CV main gearbox for harsh applications
- Coil-spring suspension for protection over bumpy terrain and operator comfort
- 2- to 14-inch cutting height
- •. 2.5-inch diameter cutting capacity

CUTTER FEATURES	F-10	F-12	F-15 FARMER	F-15 PRO
SKU No.	RCRHD10SCFLL	RCRHD10SCFLL	RCRHD15SCFLL	RCRHD15SCFLF
Cutting Width (in)	120	144	180	180
Transport Width (in)	93	97	116	116
Transport Height (in)	68	65	75	75
Overall Width (in)	126	155	187	187
Overall Length (in)	162	148	172	172
Cutting Height (in) [5]	1 - 15	2 - 12	2 -	14
Height Adjustment	Hydraulic Cylinder	Hydraulic Cylinder	Hydraulio	: Cylinder
Jack Stand		Stan	dard	
Hitch Pull-type	Parallel Clevis	Pull-Swivel	Cle	evis
Blade Carrier		Infinity	· Steel	
Blades (in)	1/2 x 3	High Lift	1/2 × 4 P	arallel Lift
Blade Overlap (in)		6	5	
Tractor PTO Range (hp)	25 - 60	35 - 60	50 -	130
Gearbox: Power Divider (hp) [6]		160	HP	
Gearbox: Center & Wing (hp) [6]	6	5	13	30
Gearbox Oil (85W-140)		Factory-fille	ed Lucas Oil	
Output Shaft Diameter (in)	1-9	/16	2	2
Blade Tip Speed: Center 540 rpm (fpm)	13,028	14,504	14,861	14,861
Blade Tip Speed: Wing 540 rpm (fpm)	13,680	13,925	14,861	14,861
Blade Tip Speed Center 1000 rpm (fpm)	_	_	15,570	15,570
Blade Tip Speed Wing 1000 rpm (fpm)	_	_	15,776	15,776
Cutting Diameter Capacity (in)	2	1-1/2	2-1	1/2
Driveline Protection		Slip C	lutch	
Driveline ASABE: Main	CAT 4 CV	CAT 4 Equal Angle	Cat	5 CV
Driveline ASABE: Wing	CAT 3 SC	CAT 3	Ca	t 4
Deck Thickness: Center (ga)	12	12 Top / 10 Bottom	10 Top /	7 Bottom
Deck Thickness: Wing (ga)	12	12 Top / 12 Bottom	10 Top / 1	10 Bottom
Side Skirt Thickness x Height (in)	1/4 x 10	1/4 x 11-1/2	1/4 x	12-3/8
Tires & Wheels		Foam-filled		Laminated
Wing Lift (in)	Hydr	aulics	Mechanica	al Level Lift
Wing Flex: Up / Down (Degrees)	90° / 22°	88° / 25°	87°	/ 25°
Safety Tow Chain	Standard		Standard	
LED Light Kit	_		Standard	
Safety	Deflectors or Chain	Chain Guards	Deflectors a	nd/or Chains
Tongue Weight (lb)	720	748	1,4	130
Approximate Weight (lb)	2,190	2,750	4,2	290
Gearbox Warranty	5-year L	imited ^[7]	6-year Limited ((w/ 2-year seals)
Warranty		1-year Full		

^[5] Cutting height dependent on tire size [6] Gearbox ratings based on field performance [7] For non-commercial use only

TRACTOR COMPATIBILITY	F-10	F-12	F-15 FARMER	F-15 PRO
SKU No.	RCRHD10SCFLL	RCRHD12SCFLL	RCRHD15SCFLL	RCRHD15SCFLF
2645	×			
2660	×	X		
2670	X	X		
4550	×			
5145 / 5155	X			
6065 / 6075	×	×	×	X

FINISH MOWERS

MAINTAIN A WELL-MANICURED LAWN

Mahindra finish mowers are ideal for businesses, estates, farms, hospitals, orchards, and parks. They transform high grass into a groomed, professional cut lawn. Anti-scalp features include four oversized wheels to ensure even cutting and a floating hitch to hug the contoured terrain. They are easily adjustable and low maintenance machines. Landscaping at its finest.

- •. Available in 4 to 7-ft cutting widths
- Adjustable tires with 360-degree rotation help prevent scalping hills and depressions
- Built heavy-duty, with few parts, for low maintenance

- •. Smooth deck for easy cleanup and to prevent rust
- •. 5-year limited gearbox warranty



MOWER FEATURES	4 FT	5 FT	6 FT	7 FT
PTO Horsepower Range (hp)	14 - 23	23 - 32	32 - 40	35 - 50
Weight (lb)	420	440	500	850
Hitch Category		CA	T 1	
Hitch Type		3-pt floating (Adjus	stable front & rear)	
Wheel Qty			4	
Wheel Rotation		36	60°	
Discharge		Re	ear	
Anti-Scalp		Ye	2S	
Spindles		Lubricating wit	th check valves	
Protection		Shea	r Bolt	
Offset		Horizontal;	. Adjustable	
Blade Qty		3		6
External Belt Qty		2	2	
Gearbox Warranty		5-year	limited	
Warranty	Resider	ntial, semi-commercial, ı	regular commercial use	: 1 year
SKU No.	FMMSD4	FMMSD5	FMMSD6	FMMSD7
TRACTOR COMPATIBILITY	4 FT	5 FT	6 FT	7 FT
eMax 25L	X			
1126	X			
Max 26XLT	X	X		
1626		X	X	
1635		X	X	
1640		X	X	
2638		X	X	
2645			X	
2660			X	X
2670			X	X
4540			X	X
4550			X	X
5145 / 5155			X	X
6065 / 6075				X

BOX SCRAPERS

KEEP FROM STANDING ON SHAKEY GROUND

Mahindra box scrapers come in handy for ripping ground material, and leveling, grading, and backfilling materials like pea gravel and dirt. Great for construction site work, leveling, and maintaining driveways, garden prep work, repairing holes, and contouring property. We build our box scrapers rugged and quick to adjust and maintain. Our optional scarifier shanks break up compacted soil, while the box holds and channels dirt and aggregate uniformly where you want it. You might say, it can even any playing field.

- •. Works with 17 60 hp tractors
- CAT 1, quick-hitch connection using clevis pins for easy hookup
- Choose from 4- to 6-ft wide standardduty models or 5- to 8-ft wide heavy-duty configurations
- Reinforced scarifier slots for long-lasting tool life
- Wide box holds, distributes, and grooms large volumes of material in less time
- •. One-year warranty for peace of mind



SCRAPER FEATURES	STANDARD-DUTY				HEAVY-DUTY			
Width (ft)	4 5 6			5	6	7		
Required engine power (hp)		55						
Quick-hitch Compatible		No						
Hitch Category			CA	Т1				
Hitch Type			3-pt	Lift				
Weight (lb)	247	305	330	455	525	600		
Slots		Reinfor	ced for prolong	ed use without	splaying			
Shanks		Heavy	-duty, replaceat	ole tips and adju	ıstable			
Tips			Hardened, rep	laceable steel				
End Plates (in)	20	× 14.5 × 1/4 th	nick	24	4 × 16 × 1/2 thi	ck		
Cutting Blades		3/8-inch	thick x 6-inch ta	all x various wic	Ith of unit			
Warranty		Residential, ser	mi-commercial, ı	regular comme	rcial use: 1 year	,		
SKU No.	BSASD4	BSASD5	BSASD6	BSAHD5	BSAHD6	BSAHD7		
TRACTOR COMPATIBILITY	s	TANDARD-DUT	ГҮ		HEAVY-DUTY			
eMax 20S	Χ							
1120	Χ							
eMax 25L	Χ	X						
1126	Χ	X						
Max 26XLT	Χ	X						
2100		X						
1626		X						
1635		X	X					
1640		X	X					
2638		X	X					
2645			X	X				
2660						X		
2670						X		
4540			X	X	X	X		
4550				X	X	X		
5145 / 5155				X	X	X		
6000						X		

 $For older \ Mahindra \ tractor \ models \ that \ are \ not \ listed \ on \ the \ compatibility \ sheet, \ please \ consult \ with \ your \ Mahindra \ dealer \ for \ your \ implement \ selection.$

TILLERS

DON'T TREAT YOUR SOIL LIKE DIRT

Mahindra tillers help everyone, from the novice to the commercial farmer, get more out of the soil. They're ideal for home gardening, landscaping, nurseries, orchards, and agriculture. They efficiently increase soil aeration, which helps crops root quicker and grow deeper, improving overall plant health. So, if you need to turn over, break down, mix and weed soil – let us dig in. Our tillers exhibit hefty frames, thick gauge shrouds, overbuilt gearboxes, forgiving slip clutches, robust flanges and high-strength blades. All backed by a 5-year gearbox and 1-year full / comprehensive warranty.

- •. CAT 1 quick-hitch compatible
- •. 4-, 5-, and 6-ft wide tillers with 6.5- or 7.5inch digging depth, depending on model
- Side-gear drive to ease mechanical stress, reduce heat buildup and extend gearbox and oil life



TILLER FEATURES	4 FT	5 FT	6 FT		
SKU No.	RTMSD4 RTMSD5		RTMSD6		
Duty Cycle		Standard			
Min/Max PTO (hp)	18 - 35	25 - 45	40 - 55		
Operating Width (in)	48.0	62.0	74.0		
Overall Length (in)	26.9	27	7.6		
Overall Height (in)	32.3	33	3.1		
Min/Max Working Depth (in)	6.5	7	.5		
Weight (lb)	356	488	626		
Shipping Width (in)	52.2	67.1	79.3		
Hitch Type	3-pt Lift				
Hitch Category	CAT O / 1 CAT 1				
Quick-hitch Compatible [8]	Yes (CAT I only)				
Parking Stand	Yes				
Drive Type	Gear				
PTO Speed (rpm)	540				
PTO Category	1				
Driveline Protection	Slip Clutch				
Remote Valve Required	No				
Hood Thickness (ga)	5.5				
Rotor Size (in)	15.8 18.3				
Rotor Speed (rpm)	240				
Blades Type	С				

TILLER FEATURES	4 FT	5 FT	6 FT
Blade Qty	20	42	54
Flange Qty	5	7	9
Blade Length (in)		9.5	
Depth Control	\	/ia Skid Shoe:	5
Gearbox Warranty	5	-years Limite	d
Warranty	1-year	Full / Compre	hensive
TRACTOR COMPATIBILITY	4 FT	5 FT	6 FT
eMax 25L	X		
1126	X		
Max 26XLT	X		
2123	X		
2126	X		
1626		X	
1635		X	
1640		X	
2638		X	
2645		X	
2660			X
2670			X
4540			X
4550			X
5145 / 5155			×

[8] Must Meet ASABE Specifications

MEDIUM-DUTY DISC HARROWS


SAVE MONEY WITHOUT LOSING GROUND

Mahindra medium-duty disc harrows are a budget-friendly alternative to more expensive cultivators. They may not have all the bells and whistles, but they're engineered to get your primary tilling done. There are five configurations, all equipped with hardened notched discs and rigid frames to penetrate, chop, bust up, turn over, and aerate compacted soil.

FEATURES & BENEFITS

- •. Category 1, quick-hitch compatible
- •. Heavy-duty 2.5-inch tube frame
- •. Equipped with 16, 18, or 20 replaceable discs

•. Sealed self-aligning bearings keep dirt out and improve product life

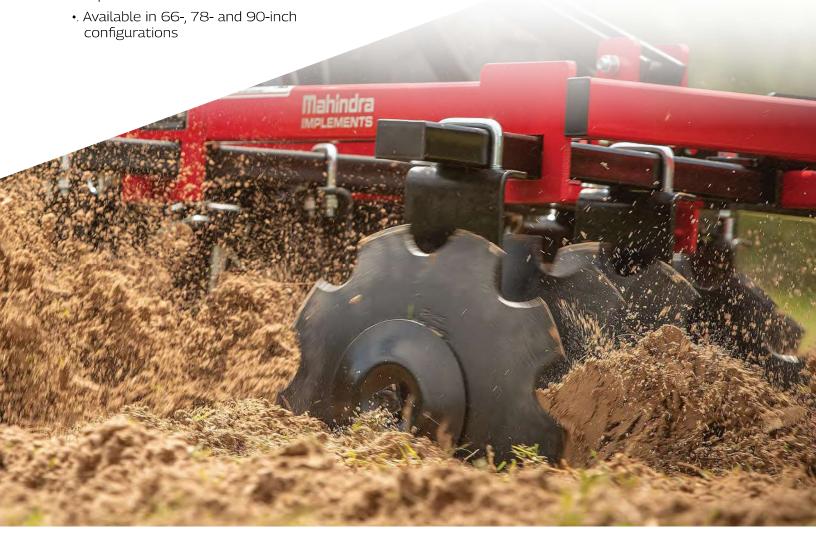

HARROW FEATURES	5.5	FT	6.5	7.5 FT		
Overall Width (in)	6	6	7	90		
Min/Max Engine (hp)	24	- 40	30	- 50	40 - 60	
Hitch Category			CAT 1			
Hitch Type			3-pt Lift			
Quick-hitch Compatible			Yes			
Disc Diameter (in)	16	1	8	2	.0	
Disc Qty	1	6	2	.0	24	
Disc Spacing (in)			7			
Replaceable Discs			Yes			
Tube Frame			2.5			
Warranty	Re	Residential, semi-commercial, regular commercial use: 1 year				
SKU No.	DHA16X16X66	DHA16X18X66	DHA20X18X78	DHA20X20X78X7	DHA24X20X90X7	
TRACTOR COMPATIBILITY	5.5 FT 6.5 FT 7.5 F				7.5 FT	
2126	×	×				
1626	×	×				
1635	×	×	×	×		
1640	×	×	×	×		
2638	x x x			×		
2645	X X		×	×	X	
2660					X	
2670						
4540	X	X	X	X	X	
4550			×	×	X	
5145 / 5155				X	X	

REAR BLADES

LET US LEVEL WITH YOU

Mahindra rear blades quickly move topsoil, gravel, snow, and other aggregates. They're ideal for grading landscapes, cleaning up worksites, improving roads, and removing driveway snow. All have heavy-duty frames, beefy steel moldboards that pivot 360°, stout reversible and replaceable cutting blades, and are quick-hitch compatible with parking stand. What's more, there are nine configurations to match up with your tractor size and usage level.

FEATURES & BENEFITS

STANDARD-DUTY

- •. 4 to 6-ft widths
- •. CAT 1 connection for sub-compact and compact utility tractors

HEAVY-DUTY

- •. 7- and 8-ft widths with ratchet offset, tilt, and pivot for ditching or fence line grading
- •. CAT 1 and 2 connections for utility tractors



BLADE FEATURES		FIXED ECONOMY	,		ANDARD- JTY		IUM- ITY		VY- ITY
Operating Width (ft)	4	5	6	5	6	6	7	7	8
Max Engine (hp)	25 30 35		5	55	5	5	\mid \in	55	
Hitch Type					3-pt				
Hitch Category				CAT 1				CAT	1/2
Quick-hitch Compatible					Yes	·			
Moldboard Thickness x Height (in)	(0.25 x 13.5	5	0.25	× 17	.25 x	15.75	0.3 x 17.5	
Blade Thickness x Height (in)	0.4 × 6				0.5	x 6			
Blades				Revers	ible & Repl	aceable			
Forward/Reverse Angle Qty			5			3	3		5
Optional Hydraulic Angling				No				Y	es
Offset Positions		_			5	4	4		_
Left/Right Ratchet Offset					6" Left / :	12" Right		30°	/ 30°
Pan Tilt (Degrees)			15°		20°		15°		
Parking Stand	No		Y	es	1				
Weight (lb)	158	180	202	375	404	34	40	667	702
Warranty		Resid	dential, se	mi-comme	rcial, regula	ar commer	cial use: 1	year	
SKU No.	BLFSD4	BLFSD5	BLFSD6	BLQSD5TLT	BLQSD6TLT	BLTMD6	BLTMD7	BLFHD7	BLFHD8
TRACTOR COMPATIBILITY	FIXED ECONOMY		STANDARD- MEDIUM- DUTY DUTY				AVY- ITY		
eMax 25L	X								
1126	X								
Max 26XLT	X								
2100		X							
1626		X	X	X					
1635		X	X	X	X	X		X	
1640			X	X	X	X		X	
2638			X	X	X	X		X	
2645			X		X	X		X	
2660					X	X	X		
2670							X	X	X
4540 / 4550					X	X	X	X	
5145 / 5155					X	X	X	X	X
6065 / 6075								X	X

LANDSCAPE RAKES

SIFT SOIL INTO SHAPE USING TRACTOR PULLING POWER

Mahindra landscape rakes remove debris while conditioning soil and seedbeds. They're dependable spreading landscaping mulch and compost, grading gravel driveways, and beach grooming too. Our rakes are overbuilt with heavy gauge frames and tempered tines, easily displacing rocks, weeds, and roots while leaving soil where it belongs. 360-degree positioning controls debris purge flow to a single side when pulling or pushing rake.



RAKE FEATURES	STANDARD-DUTY				
Operating Width (ft)	4	6			
Weight (lb)	220	230	250		
Hitch Category		CAT 1			
Hitch Type		3-pt Lift			
Frame Tube (in)		5/16 thick x 4 x 4			
Forward/Reverse Angle Positions		4 / 4			
Tines (in)	5/16	thick x 1 wide tempered stee	l		
Warranty	Residential, semi-c	commercial, regular commerci	al use: 1 year		
SKU No.	KLRSD4	KLRSD5	KLRSD6		
TRACTOR COMPATIBILITY	STANDARD-DUTY				
eMax 25L	X	X	X		
1126	X				
Max 25XL	X X		X		
Max 26XLT	X	X	X		
2123	X				
2126		X			
1626		X	X		
1635		X	X		
1640		X	X		
2638		X	X		
2645			X		
2660					
2670					
4540			X		
4550			X		

 $For older \ Mahindra \ tractor \ models \ that \ are \ not \ listed \ on \ the \ compatibility \ sheet, \ please \ consult \ with \ your \ Mahindra \ dealer \ for \ your \ implement \ selection.$

LAND LEVELERS

LET IT RIP FOR LESS

Mahindra land levelers are an inexpensive tool for homeowners, landscapers, and farmers. They're tough enough to rip into rocky soil and level truly knotty terrain. As well as capable enough to smooth both dirt and gravel roads. They have heavy gauge frames and cutting blades for the most demanding tasks, and are ideal for subcompact, compact, and utility tractors up to 70 horsepower. With this tough tool, you don't have to spend a lot for grading landscapes.

- •. CAT 1 quick-hitch compatible
- . Choose 5-, 6- or 7-ft widths
- Hefty frame and thick, heattreated cutting blades for compact or rocky soil

- •. Commercial-duty, 3/8-inch thick, reversible cutting blade
- •. Reversible and replaceable skid shoes



LEVELER FEATURES		5 FT			6 FT			7 FT	
Crowning				Left, Rig	ht, & Bi-Dii	rectional			
Min/Max Engine Rating (hp)	25 - 40			30 - 55			35 - 70		
Quick Hitch Compatible					Yes				
Hitch Category					CAT 1				
Weight (lb)	485			525			575		
Overall Width (in)		60.5			72.5			84.5	
Overall Length (in)					65				
Side Panel Dimensions (in)			59	.5 length x	14 height	t x 3/16 th	nick		
Front Beam (in)				3.0 x	4.0 × 3/16	5 thick			
Rear Beam (in)				2.0 x	2.0 × 3/16	thick			
Offset Cutting Blades (in)		6.0 height x 3/8 thick; (2) Reversible and Replaceable							
Skid Shoes (in)		Replaceable, 2.0 wide x 1/4 thick							
Warranty	Residential, semi-commercial, regular commercial use: 1 year								
SKU No.	LLALC5	LLABD5	LLARC5	LLALC5	LLABD5	LLARC5	LLALC5	LLABD5	LLARC5
TRACTOR COMPATIBILITY		5 FT			6 FT			7 FT	
eMax 25L		×							
1126		×							
Max 26XLT		×							
2100		×							
1626		×		X					
1635	X			X					
1640	X			X		X			
2638	X		X		X				
2645	X		X			Х			
2660			X			Х			
2670								Х	
4540		Х			Х			Х	
4550					X			X	

AUGERS

DRILL DOWN IN IT

Drop the shovels, post hole diggers, and digging bars. Our Mahindra PTO-powered earth augers are well-suited for home gardeners, farmers, ranchers, landscapers, nurseries, and residential and commercial construction. They work with subcompact, compact, and utility tractors that transmit 25 - 65 PTO hp. These beasts bore through compacted and rocky ground — nearly 4 ft deep — using their heavy-duty high-carbon steel cutting edges, protected by a heavy-duty gearbox and shear bolt. Combined with your tractor's PTO power, our augers make fence building and tree planting a lot quicker and easier. Now, you know the drill.

FEATURES & BENEFITS

- •. CAT I or 2 compatible
- Shear-bolt protection for your valuable investment

• Replaceable, high-carbon steel cutting edges



AUGER FEATURES		BORING BITS		DRIVE UNIT
Boring Diameter (in)	6 9 12			_
Maximum Auger Diameter (in)		-		12 ^[9]
Boring Depth (in)		45		_
Digger Weight (lb)		180		210
Auger Weight (lb)	30	41	60	-
Tractor PTO (hp)		25 -	- 65	
Hitch Category		CAT 1	Lor 2	
Gear Box Output Shaft Dia. (in)		2		2.92
Cutting edges	Rep	olaceable, high-carbon s	teel	_
Gear-Box Protection				
Warranty	Resider	: 1 year		
SKU No.	AUGQBIT6	AUGQBIT9	AUGQBIT12	AUGQMOTOR3PT
AUGER FEATURES		BORING BITS		DRIVE UNIT
2100	X	X	X	X
1626	X	X	X	X
1635	X	X	X	X
1640	X	X	X	X
2638	X	X	X	X
2645	X	X	X	X
2660	X	X	×	X
2670	×	×	X	X
2670 4540	×	×	×	X X
4540	X	X	X	X

[9] Auger not included

SPREADERS

GIVE YOUR SEED & FERTILIZER WINGS

Mahindra spreaders evenly distribute fertilizer, grass seed and small grain seed. There are two size configurations to operate with your CAT 1 subcompact, compact, or utility tractor. The pull-type model tows with a tractor, ATV, or UTV. The 440-lb models can carry almost nine 50-lb bags of fertilizer while the 1020-lb version holds 18. Get ready to spread some good into the world.

- •. Two CAT 1 and one pull-type configurations •. 440- and 1020-lb load capacities
- •. Heavy-duty poly hopper to prevent corrosion •. One-year warranty for peace of mind



SPREADER FEATURES	480 LB LIFT	1020 LB LIFT			
Approximate Weight (lb)	119	139			
Hopper Type	Poly				
Hopper Capacity (lb)	440	1020			
Height (in)	36	44.5			
Spreading Width (ft)	20 -	- 46			
Spreader Drive	PT	го			
Gearbox	1 t	0 1			
Gearbox Disengagement	-	-			
Spreader Pattern	-	-			
Spreader Rate Adjustment	-	-			
PTO Diameter (in)	1-3	3/8			
Hitch Ball Diameter (in)	_				
Hitch Type	CAT 1				
Wheels (in)	_	_			
Frame	Tubular Steel				
Hopper Agitator	Yes				
Warranty	Residential, semi-commercial, regular commercial use: 1 year				
SKU No.	FSQ480	FSQ1020			
TRACTOR COMPATIBILITY	480 LB LIFT	1020 LB LIFT			
Max 26XLT	X				
2100	X				
1626	X	X			
1635	X	X			
1640	X	X			
2638	X	X			
2645	X	X			
2660	X	X			
2670	X	X			
4540	X	X			
4550	X	X			

HITCHES

THE PERFECT MARRIAGE


Make the perfect connection with the Mahindra 3-pt quick hitch. It's a back and time-saver, eliminating the need to remove or replace connector pins. [10] Instead, quick-release levers lock around your tractor's pre-installed bushings in only a few seconds. The Mahindra trailer mover is a must-have 3-pt hitch to help you move equipment, including boats, machinery, and trailers around your property. [11] Get hitched with us, you won't regret it.

3-PT QUICK HITCH FEATURES & BENEFITS

- •. 3-pt, CAT 1 or 2 compatible
- •. Heavy-duty construction
- Locking levers save valuable time attaching and quick-releasing implements
- Available for subcompact, compact, and utility tractors rated up to 140 horsepower

TRAILER MOVER FEATURES & BENEFITS

- •. 3-pt, CAT 1 quick-hitch compatible
- •. Moves bumper-pull and gooseneck trailers
- · One-year warranty for peace of mind

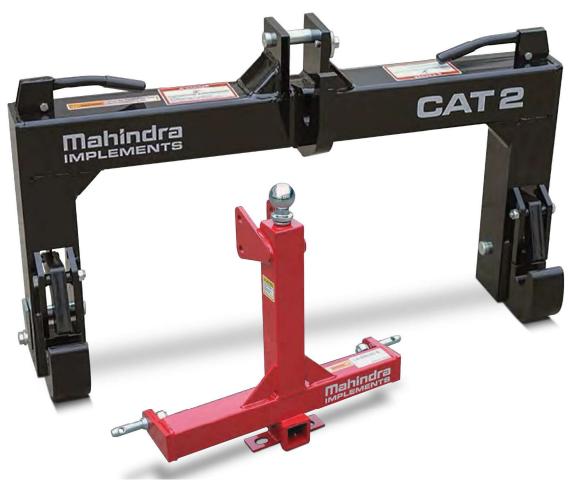

HITCH FEATURES	CAT 1 QUICK HITCH	CAT 2 QUICK HITCH	TRAILER MOVER
Max Engine Rating (hp)	70	125	60
Hitch Category	CAT 1	CAT 2	CAT 1
Quick-hitch Compatible	-	Yes	
Weight (lb)	8	34	_
Top Hook	Adjus	_	
Hitch Auto-lock	Ye	_	
Construction	Heavy	_	
Quick-release Function	Lev	_	
Overall Depth (in)	-	37.5	
Overall Height (in)	-	_	20.5
Overall Width (in)	-	_	25
Max Spear Length (in)	-	_	40
Max Spear Lift Capacity (lb)	_		2000
Warranty	Residential, ser	rcial use: 1 year	
SKU No.	QHQCAT1	QHQCAT2	ТМQЗРТ
TRACTOR COMPATIBILITY	CAT 1 QUICK HITCH	CAT 2 QUICK HITCH	TRAILER MOVER
eMax 20S	X		X
1100	X		X
eMax 25L	X		X
Max 26XLT	X		X
2100	X		X
1626	X		X
1635	X		X
1640	X		X
2638	X		X
2645	X		X
2660	X		X
2670	X	X	
4540	X	X	X
4550	X	X	X
4550			
5145 / 5155	X	X	

OFFICIAL TRACTOR OF TOUGH...

mahindra

9020 Jackrabbit Road, Suite 600 Houston, Texas 77095 (877) 449-7771

mahindrausa.com mahindracanada.ca

Mahindra USA, Inc., reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were made to verify the information contained in it. Some items shown may be optional and some machinery shown may not be available at all dealers. Mahindra disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety, and product information, consult your local Mahindra dealer and the product operation manual. Engine power (hp/kw) and other specifications are based on various standards and best practices. This brochure is intended for the United States and its territories only. For more information visit our website.

07/24/2024